

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
12 May 2005 (12.05.2005)

PCT

(10) International Publication Number
WO 2005/043689 A1

(51) International Patent Classification⁷: H01R 13/52

(21) International Application Number:
PCT/US2003/031541

(22) International Filing Date: 3 October 2003 (03.10.2003)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): TYCO HEALTHCARE GROUP LP [US/US]; 15 Hampshire Street, Mansfield, MA 02048 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): MCINTIRE, James, Francis [US/US]; 4027 Imperial Drive, West Linn, OR 97068 (US). HAUG, Brian, Erik [US/US]; 2170 NE Hancock Street, #3, Portland, OR 97212 (US).

(74) Agent: LEONARDO, Mark, S.; Brown Rudnick Berlack Israels LLP, One Financial Center, Boston, MA 02111 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CABLE TERMINAL SEALING FACILITY

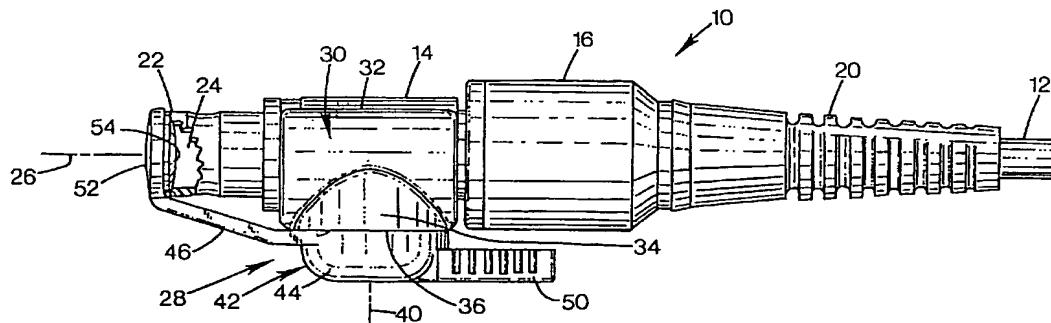

(57) Abstract: A cap facility for a medical cable having a terminal defining a rimmed chamber containing electrical contacts. The facility has a frame that connects to the terminal. An arm is connected to the frame, and is movable between a first closed position and a second open position. The arm is biased to the closed position, and has a cap adapted to enclose the rimmed chamber when the arm is in the closed position. The cap has an arcuate motion path between the open position and an intermediate position proximate to the closed position, and an initial motion path deviating from the arcuate path, such that the cap moves away from the rim initially upon departing from the closed position. The facility may have a camming mechanism that provides the path.

WO 2005/043689 A1